


# JUPITER LED Highbay – LHBN-150-CDL/60

**Crompton**

Parameter	Specification
Rated System Wattage	150W
IP Protection	IP65 Class I
Driver	Integral (inbuilt 4KV SPD)
Driver Efficiency	>90%
Rated System Efficacy	>90 lm/W
Operating Voltage Range*	120 – 270 V ~ 50Hz
THD	<10%
Power Factor	≥0.95
Surge Protection**	5kV
CCT	5700K ANSI BIN
CRI	>70
Beam Angle	60°

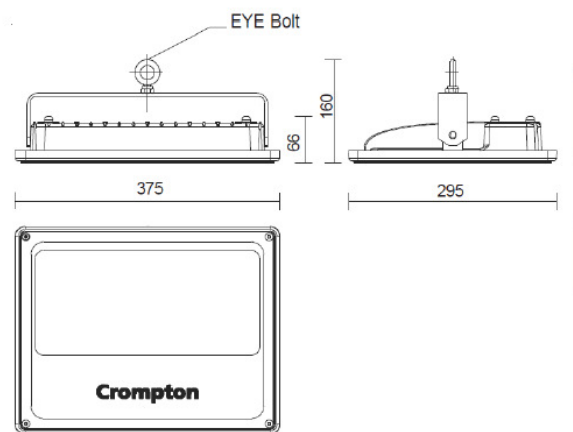

\*Luminaire operates upto 300V ~ for 72 Hours

\*\*Additional surge protection of 5kV integrated in luminaire.

Note: Above product is also available with 120° Beam Angle  
10kV SPD can also be provided on request

## **Key Features:**

- High Reliability
- Sleek innovative design for better thermal management.
- Energy efficient – saving upto 50%.
- Luminaire efficacy > 90 lm/W.
- Potted driver used to have vibration proof performance & high reliability.
- Provided with additional individual surge Suppressor 5kV (Over and above 4kV SPD inbuilt in driver).
- Driver with secondary side control for stable performance of LED.
- Luminaire operates upto 300 ~ for 72 Hours.
- Eye bolt with ant vibration rubber busing provided for mounting purpose.